
NEXIS

Model : CV124P

USB3.0 to 2 Port 4K60 HDMI adapter with DisplayLink

2. Product Picture

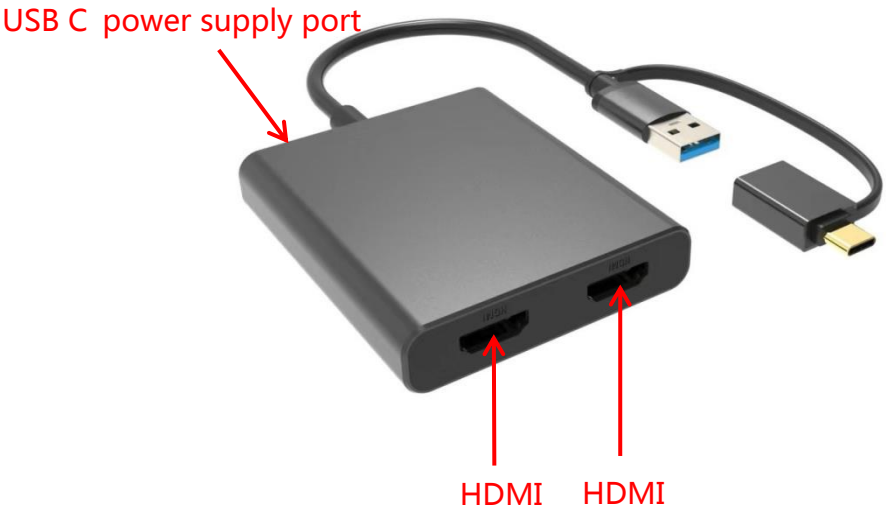

3. Interface

HDMI X2
USB C POWER SUPPLY X1

4. Description

*The USB-A port supports connecting USB-A3.0, 3.1, 3.2 ports and Type-C male/A female adapter, supports USB-C 3.0, 3.1, 3.2, and Thunderbolt ports.

HDMI single port and dual port output resolution up to 3840 2160@60Hz , downward compatible 2560* 1400@60Hz 1920* 1080@60Hz resolution. Supports WINDOWS, MAC OS system SST and MST modes.

*USB C power supply port , support max. 5V 2A input (min 5V 1A)

5. Operating System

1.MAC OS.(MAC MINI and macbook Pro etc)

2.Windows OS (WIN7、WIN8、WIN10、WIN11)

3.Linux OS

4.Andrioid7.0 and above, need hardware support

5.Chrome OS

Need install driver, search from above website for relevant OS driver:
https://www.synaptics.com/products/displaylink-graphics/downloads

6. Product Spec.:

Working voltage and current: DC5V 200mA

Chipset: DL6950

Color: Space Grey/Black

Shell: Aluminum alloy+ABS

Wire length: 15CM

Working temperature: 0 ℃ -40 ℃

Working humidity: 10% -80% without condensation

Shell size: 63 * 73.8 * 14.6mm (LXWXH)

