

CU2000 : Chairman Unit




DU2000 : Delegate Unit

★ Microphone Unit Parameters:

1) Frequency response: 50Hz-16KHz
2) Sensitivity: -44 dB±2dB
3) Reference sound receiving distance: 20~120cm
4) Portable table moving and microphone pipe can be pull out
5) Newly digital design
6) LCD display
7) Listening and speaking
8) The system power supply for all the delegate units is provided by the main unit at 24 safe voltages.
9) With 8-PIN T-type hand-in-hand interconnection cable
10) Built-in high fidelity speaker and earphone jack.
11) Electric capacity type microphone, equipped with windshield cover
12) Extended pipe optional.
13) The annular red indicator lamp could show the state of the microphone.
14) With camera auto-track function
15) With voting function (Chairman can control the voting when without computer)
16) The chairman unit number in the system is unrestricted, can join in any position of the system.
17) Chairman can turn down delegate MIC by priority button.
18) Indicative sound for chairman unit (optional)
19) C. only mode: only chairman microphone can be turn on.
20) Earphone output jack and wireless microphone input jack for chairman unit (optional)
21) Dimension :207mmX117mmX60mm
22) N.W. 1.0kgs

Schematic Diagram Of Microphone Unit

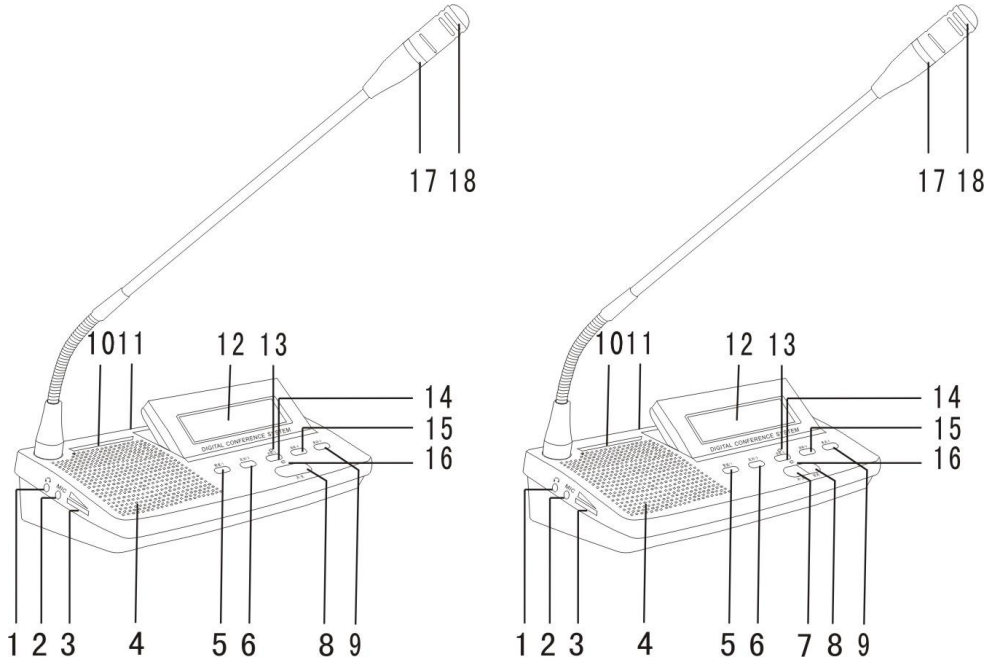

(1) Earphone jack. 3.5mm jack
(2) REC output jack. 3.5mm jack, wireless MIC jack of chairman unit
(3) Volume control
(4) Build-in loudspeaker
(5) Candidate 1/Yes/LCD contrast +/Language select +
(6) Candidate 2/No/LCD contrast -/Language select -
(7) Priority button. Chairman unit can turn off all delegate microphone
(8) MIC on/off button
(9) --/Candidate 5/start vote(on chairman unit)
(10) Sing-in IC card insert interface
(11) 8Pin socket
(12) LCD
(13) Attend/Vote indicator
(14) Candidate 3/ Abstain button
(15) -/Candidate 4 /language select/LCD contrast/Reset (on chairman unit)
(16) Power indicator
(17) Annular red indicator lamp
(18) Unidirectional electret MIC